

# Conventional Fire Alarm System 2166 Series



**AW-CBL2166**

Product Name	Fire Bell	
Model No.	Diameter	Volume (dB)
AW-CBL2166-A-4	4" (100mm)	85
AW-CBL2166-A-6	6" (150mm)	95
AW-CBL2166-A-8	8" (200mm)	97
AW-CBL2166-A-10	10" (250mm)	100
Work Voltage	DC6V/DC12V/ AC110V/	DC24V/ AC230V




**AW-CCO851**

Product Name	Carbon monoxide detector	
Model No.	AW-CCO851	
Alarm Current	≤20mA	
Value Of Detection Threshold	≥150PPM (Alarm in Less than 2 minutes)	
Control Mode	Software control	
Operating Voltage	9V-28VDC	
Standby Current	<20mA @24VDC	



**AW-LPG841**

Product Name	LPG Gas Detector	
Model No.	AW-LPG841	
Alarm Current	≤20mA	
Value Of Detection Threshold	≥150PPM (Alarm in Less than 2 minutes)	
Control Mode	Software control	
Operating Voltage	9V-28VDC	
Standby Current	<20mA @24VDC	

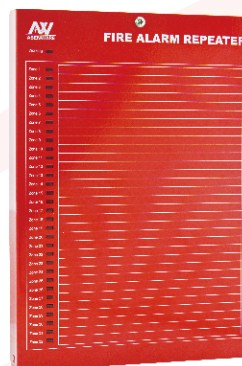

**AW-CRP2166**

Product Name	Repeater	
Model No	AW-CRP2166	
Work voltage	18V-28V DC	
Communication	RS485	
Work temperature	-10~55°C	
Work humidity	95%	
Size	190*270*30mm	