

Conventional Fire Alarm System 2166 Series



AW-CBL2166

Product Name	Fire Bell	
Model No.	Diameter	Volume (dB)
AW-CBL2166-A-4	4" (100mm)	85
AW-CBL2166-A-6	6" (150mm)	95
AW-CBL2166-A-8	8" (200mm)	97
AW-CBL2166-A-10	10" (250mm)	100
Work Voltage	DC6V/DC12V/ AC110V/	DC24V/ AC230V




AW-CCO851

Product Name	Carbon monoxide detector
Model No.	AW-CCO851
Alarm Current	≤20mA
Value Of Detection Threshold	≥150PPM (Alarm in Less than 2 minutes)
Control Mode	Software control
Operating Voltage	9V-28VDC
Standby Current	<20mA @24VDC



AW-LPG841

Product Name	LPG Gas Detector
Model No.	AW-LPG841
Alarm Current	≤20mA
Value Of Detection Threshold	≥150PPM (Alarm in Less than 2 minutes)
Control Mode	Software control
Operating Voltage	9V-28VDC
Standby Current	<20mA @24VDC

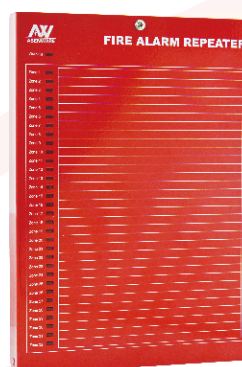

AW-CRP2166

Product Name	Repeater
Model No	AW-CRP2166
Work voltage	18V-28V DC
Communication	RS485
Work temperature	-10~55℃
Work humidity	95%
Size	190*270*30mm